



RIXI

Rixi's surface mount LED down light family has modern profile with minimal trim, sleek body with no visible screws, high purity aluminium reflector with deep LED source for visual comfort, opal IP44 rated diffuser provides uniform wide lighting distribution which enables maximum spacing between luminaires, latest generation of LED's offers high efficacy, CRI90+ available upon request, available in six different sizes and wattages for wide range of applications.

Material- Die-cast aluminium body and trim, high purity aluminium reflector or opal UV stabilized PC diffuser.

Efficacy- 86lm/W


Finish- white powder coat paint

Input voltage- 240V 50/60Hz

Dimming- Dali, DSI, 1-10V as an option

Life: 50,000 Hours L70

Warranty: 3 years

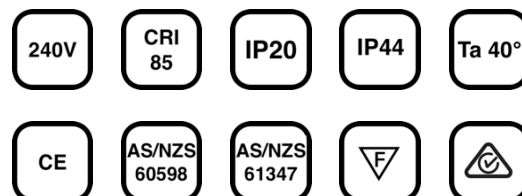



Model number	Wattage	Beam Angle	CCT	Mount	Finish	Controls
RI-12W-60-3K-S-WH-S	12W 15W 20W 25W	60°	2700K 3000K 4000K 5000K	S: Surface Su: Susp	BK WH SL	S: Standard A: 1-10V Dimming D: DALI Dimming S: DSI dimming
RI-12W-90-3K-S-WH-S	12W 15W 20W 30W	90°	6000K			

