

# MOON



## Configuration Sheet

---



### DIRECT / INDIRECT

Suspended-Surface-Recessed

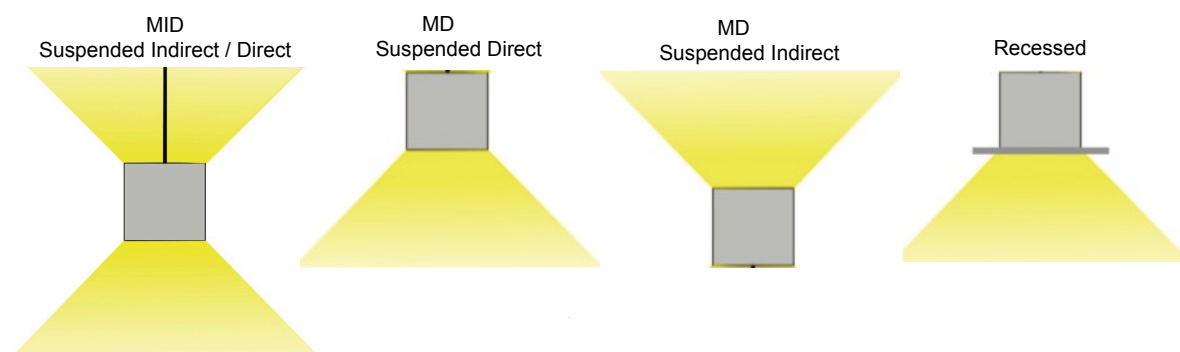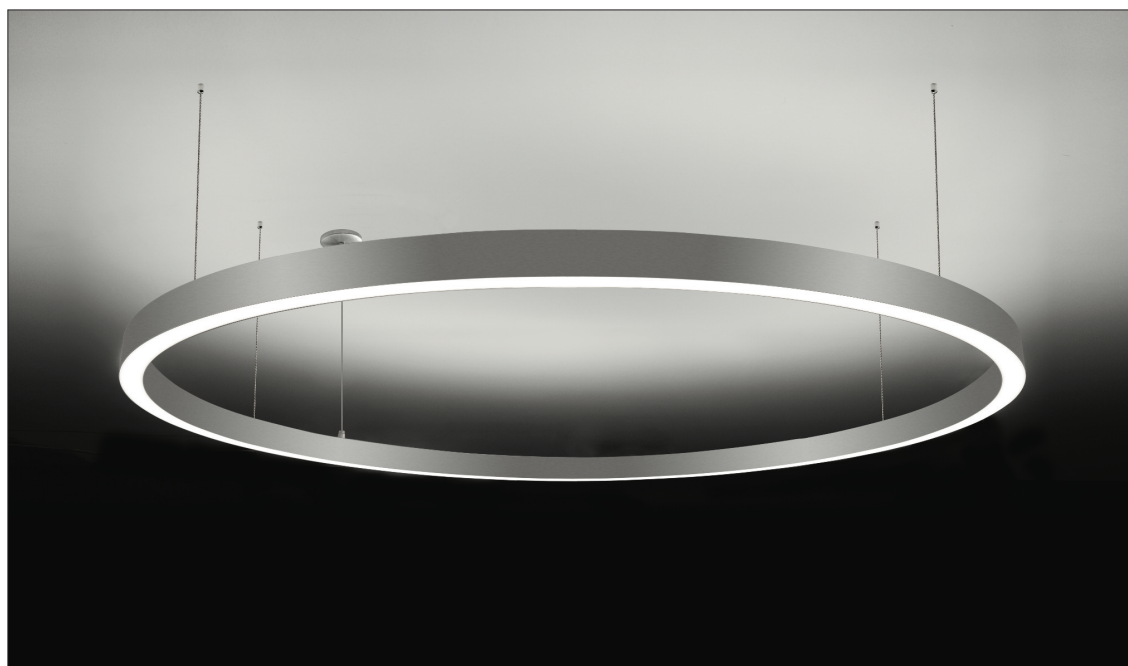

# MOON




MID: Suspended Direct/Indirect  
 MD: Suspended Direct  
 R: Recessed  
 S: Surface

## 1. Base Model

MID	Suspended - Direct/Indirect
MD	Suspended - Downward
MDU	Suspended - Upward
S	Surface mount
R	Recessed mount


### Dimensions

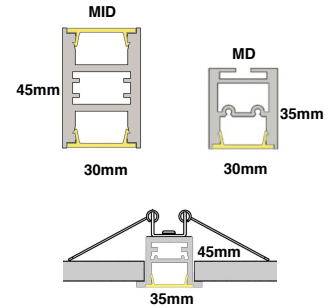

## 2. Outside Diameter and type - (minimum diameter is 600mm)

xxxmm - CIRCLE	Circle - Specify outside diameter in mm
xxxmm - HCIRCLE	Half Circle - Specify outside diameter in mm
xxxmm - 1/4 ARC	Quarter Arc - Specify outside diameter in mm
xxxmm - special shape	Radom connection of - Sectional Circle+Circle+Quarter+Straight



CIRCLE



HALF CIRCLE



1/4 ARC

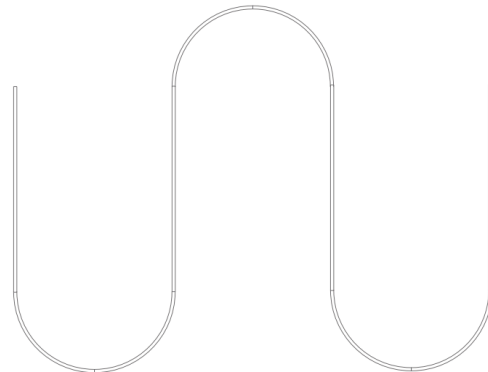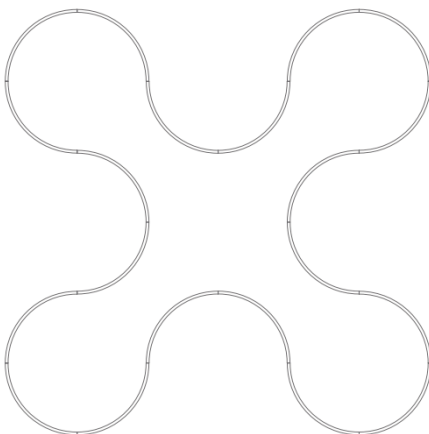

Light-up your imagination

**3. DIRECT LED Lamping - STD data shown below is for direct 1200mm diameter example**

STD - xxxxK	<b>Standard Output</b> , LED 20W/M 1708 delivered lm/1.2M ring, 71 lm/W @ 4000K
HI - xxxxK	<b>High Output</b> , LED 30W/M 2627 delivered lm/1.2M ring, 71 lm/W @ 4000K
<b>CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K</b>	
<b>Additional LED Options</b>	
CV	<b>Constant Voltage (for custom lengths) - 12Vdc/24Vdc</b> Contact factory for detail
TW	<b>Tunable White (2700K - 5700K)</b> Contact factory for detail
RGBW	<b>Standard Output - RGB+WHITE - 24Vdc/12Vdc</b> Contact factory for detail

**4. LED Driver (remote only)**

0/1-10V	0/1-10V dimming
DALI	DALI dimming
DMX	DMX dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

**5. Finish**

SL	Sliver powdercoat
BK	Black powdercoat
WH	White powdercoat
Custom	Custom Color

**6 Additional options - (remote only)**


EM	3 hour Emergency Kit - remote
MS	Motion sensor



Standard  
**STD**




Small  
**SMALL**




Combo  
**COMBO**

Ceiling rose options:



Central Combo  
Standard  
**CCSTD**

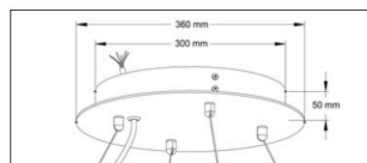

Central Combo  
Large  
**CCLG**

# MOON



## Housing

100% recyclable, extruded architectural grade T6063 aluminum

## Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.

Consult factory for options.


## Finish

Standard finish is Silver powdercoat.

White, Black, or custom RAL powdercoat options are also available.



WH - WHITE



SL - Silver



BK - BLACK



Custom/\_\_\_

*Default canopy finish  
is to match fitting color,  
unless otherwise  
specified*

CE

